C0005 **Shikumen**

Mohawk Group

Global Entry Collection

Resilient Tile

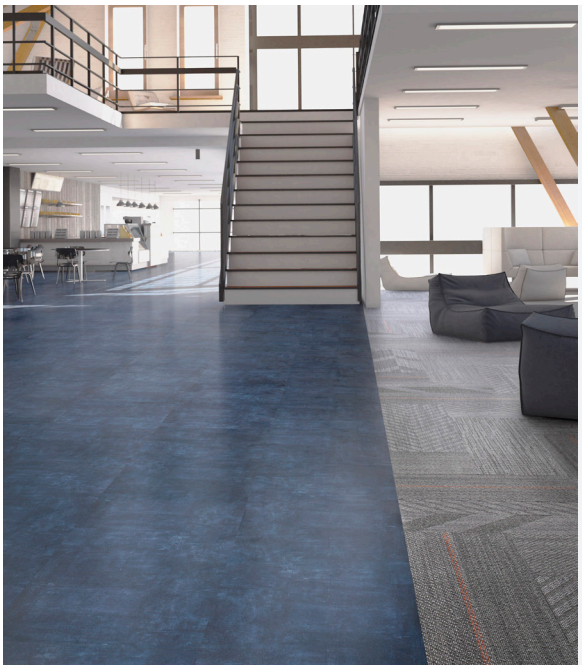

585 Chi

132
Mantra



368
Chakra

945
Meditation

585
Chi

DESIGN

Product Type ..... Resilient Tile
Overall Gauge ..... 0.10" (2.5mm)
Wear Layer ..... 20 mil (0.5mm)
Finish ..... M-Force™ Enhanced Urethane
Texture ..... Light Emboss
Edge Profile ..... Microbevel
Colors Available 4
Size ..... 18" x 36" (457.2mm x 914.4mm)
Packaging ..... 40.5 sf/ctn (3.76 m2/ctn); 9 pcs/ctn; 38.18 lbs/ctn (17.31 kg/ctn)
Installation ..... Glue Down
Recommended Adhesive ..... M95.0 Resilient Flooring Adhesive, MS160 Spray, M700 Pressure Sensitive Adhesive
Optional Underlayment ..... Mohawk AccuSound™

SELLING FEATURES

- All-over pattern hides wear
- Updated 18" x 36" format
- M-Force™ Enhanced Urethane and 20 mil wear layer for heavy commercial traffic
- No Polish maintenance reduces costs associated with long term cleaning
- QuickShip

PERFORMANCE

Construction ..... Commercial Grade Resilient Tile
Classification ..... ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness ..... ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance ..... ASTM F2055 - Passes - ± 0.016 in. per linear foot
Thickness ..... ASTM F386 - Passes - Nominal ± 0.005 in.
Dimensional Stability ..... ASTM F2199 - Passes - ≤ 0.024 in. per linear foot
Static Load Limit ..... ASTM F970 - Passes - modified - 1500 psi
Residual Indentation ..... ASTM F1914 - Passes - Average less than 8%
Slip Resistance ..... ASTM D2047 - Passes - > 0.6 Wet, 0.6 Dry
Resistance to Chemicals ..... ASTM F925 - Passes - No Change or Slight Change
Resistance to Light ..... ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance to Heat ..... ASTM F1514 - Passes - $\Delta E \leq 8$
Critical Radiant Flux ..... ASTM E648 - Passes - ≥.45 watts/cm², Class 1
Smoke Density ..... ASTM E662 - Passes

SUSTAINABILITY

Certification ..... FloorScore® Certified
Bio-Based Content ..... Contains a minimum of 8% bio-based renewable resource content by total product weight
Phthalate-Free Composition ..... Avoids harmful phthalates by substituting a new bio-based rapidly renewable plasticizer without sacrificing performance, quality and maintenance

SERVICE

Warranties ..... Limited 10 Year Commercial